
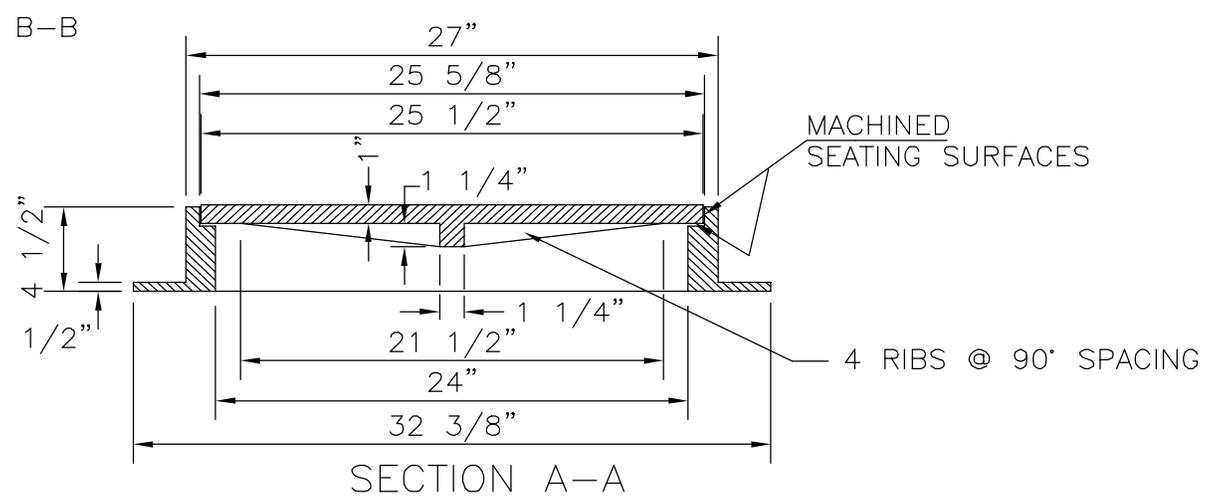
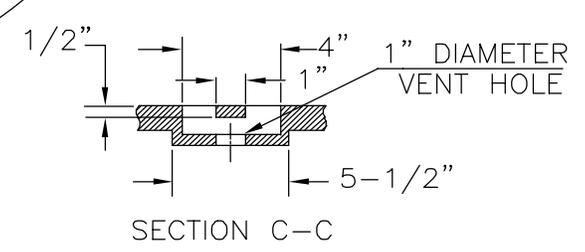
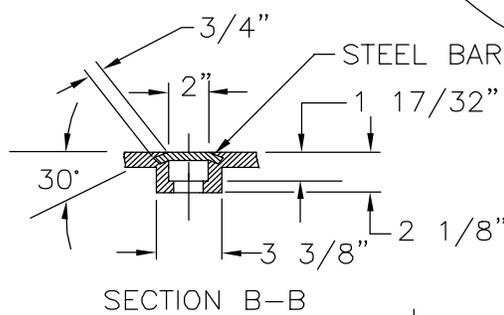


SECTION A-A

NOTES:

1. FRAME AND COVER SHALL BE MANUFACTURED OF CAST IRON CONFORMING TO ASTM A-48-CLASS 30.
2. FRAME AND COVER SHALL BE HS20-44 RATED.
3. FRAME SHALL WEIGH APPROX. 22 LBS.
COVER SHALL WEIGH APPROX. 7 LBS.
4. FRAME AND COVER SHALL BE COATED WITH BITUMINOUS MATERIAL CONFORMING TO A.W.W.A. C203.
5. COUNTRY OF ORIGIN AND MANUFACTURER SHALL BE CAST INTO FRAME AND COVER.


REVISION	DATE	COUNTYWIDE IMPROVEMENT STANDARDS COUNTY OF SAN JOAQUIN	APPROVED
			SAN JOAQUIN COUNTY DATE DIRECTOR OF PUBLIC WORKS
		SURVEY MONUMENT FRAME & COVER	IMPROVEMENT STANDARD NO. CW-M1

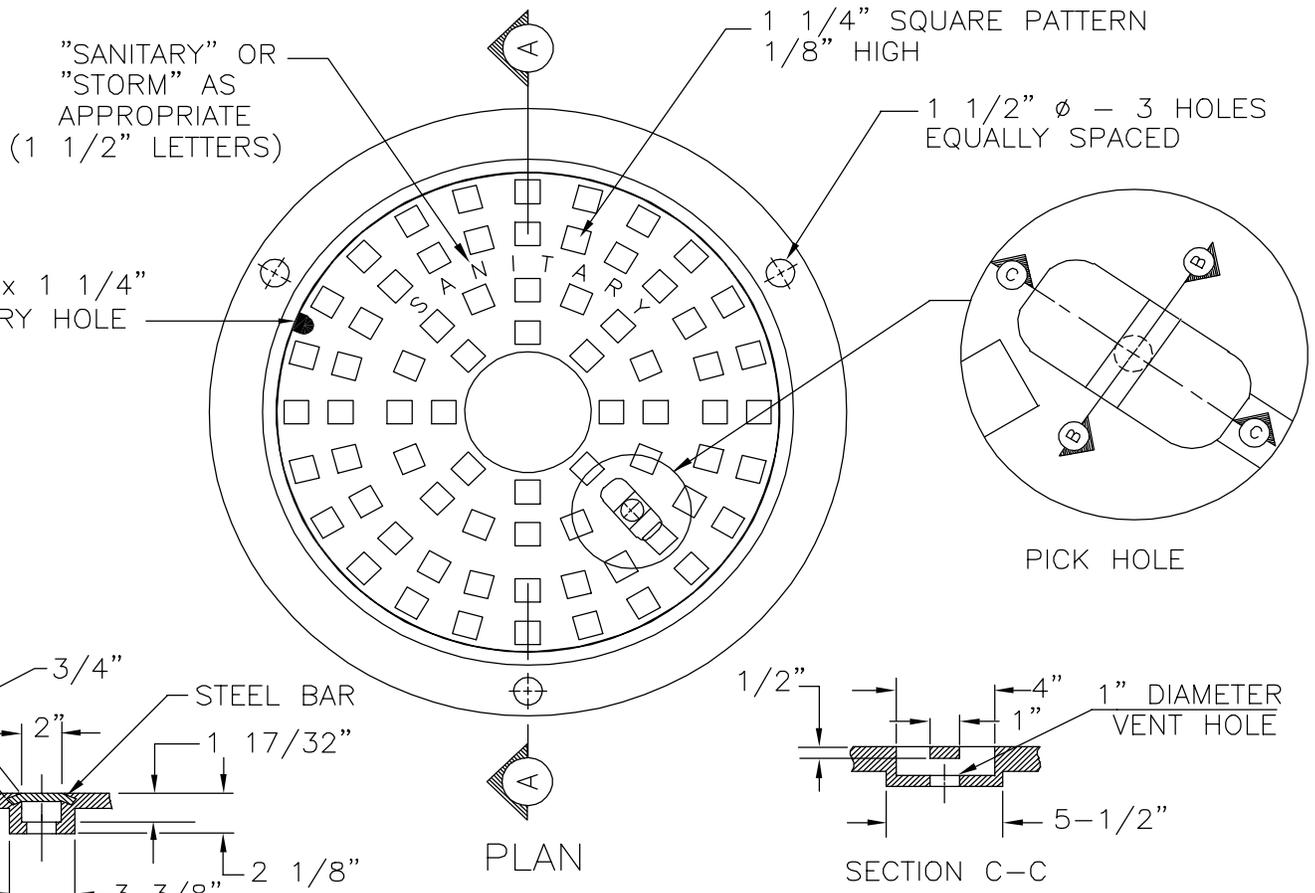


NOTES:

1. FRAME AND COVER SHALL BE MANUFACTURED OF CAST IRON CONFORMING TO ASTM A-48-CLASS 30
2. FRAME AND COVER SHALL BE HS20-44 RATED.
3. FRAME SHALL WEIGH 140 LBS. MINIMUM; COVER SHALL WEIGH 130 LBS. MINIMUM.
4. FRAME AND COVER SHALL BE COATED WITH BITUMINOUS MATERIAL CONFORMING TO A.W.W.A. C203.
5. COUNTRY OF ORIGIN AND MANUFACTURER SHALL BE CAST INTO FRAME AND COVER.


REVISION	DATE	COUNTYWIDE IMPROVEMENT STANDARDS COUNTY OF SAN JOAQUIN	APPROVED BY
			SAN JOAQUIN COUNTY DATE DIRECTOR OF PUBLIC WORKS
		<h1>MAINTENANCE HOLE FRAME AND COVER</h1>	IMPROVEMENT CW-M3 STANDARD NO.

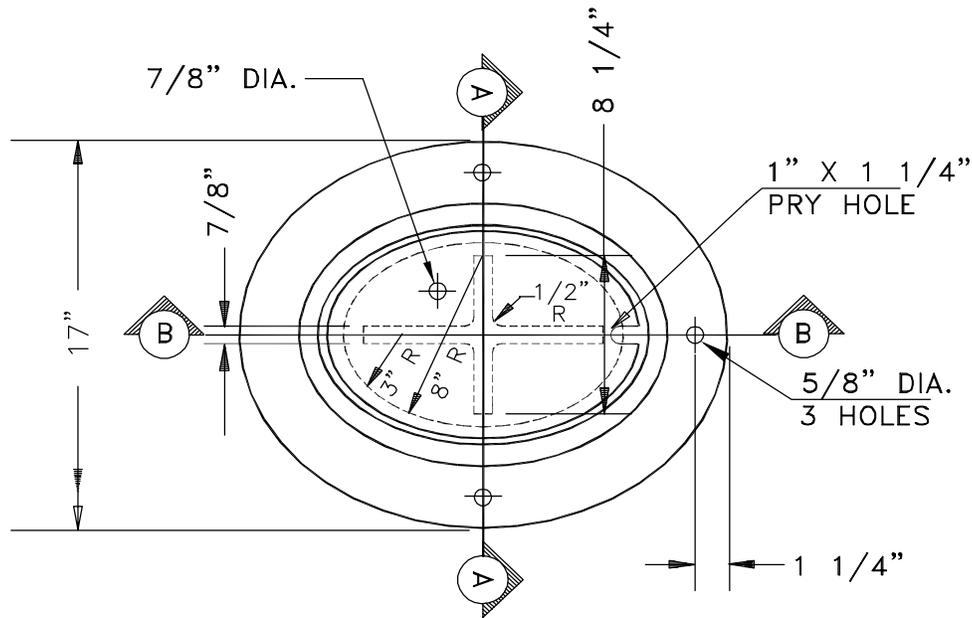

PLAN

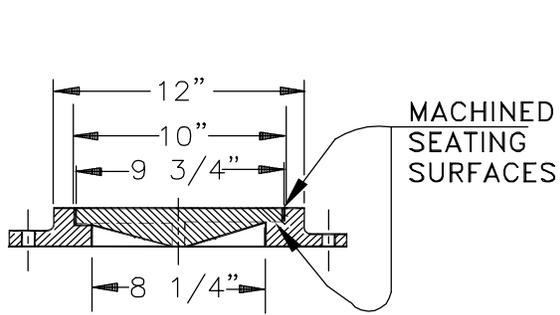

SECTION A-A

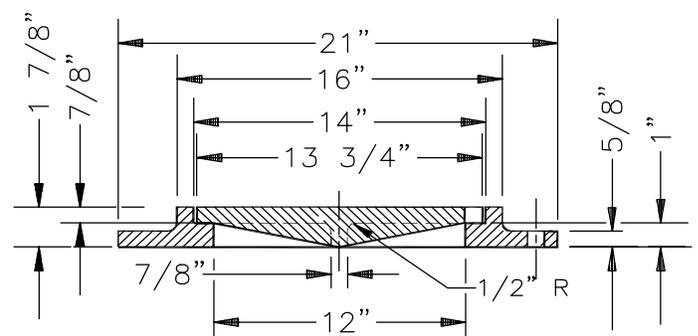

SECTION B-B

NOTES:

1. FRAME AND COVER SHALL BE MANUFACTURED OF CAST IRON CONFORMING TO ASTM A-48-CLASS 30.
2. FRAME AND COVER SHALL BE HS20-44 RATED.
3. FRAME SHALL WEIGH APPROX. 45 LBS.
4. COVER SHALL WEIGH APPROX. 25 LBS.
5. FRAME AND COVER SHALL BE COATED WITH BITUMINOUS MATERIAL CONFORMING TO A.W.W.A. C203.
6. COUNTRY OF ORIGIN AND MANUFACTURER SHALL BE CAST INTO FRAME AND COVER.

REVISION	DATE	COUNTYWIDE IMPROVEMENT STANDARDS COUNTY OF SAN JOAQUIN	APPROVED BY
			SAN JOAQUIN COUNTY DATE DIRECTOR OF PUBLIC WORKS
		LAMPHOLE FRAME & COVER	IMPROVEMENT STANDARD NO. CW-M5

